


| | DESIG | P | DRAWN BY | DART AEROSPACE L HAWKESBURY, ONTARIO, CANADA | |
|---|----------|-----|------------|-------------------------------------------------|--------------|
| ı | CHECK | (ED | APPROVED A | DRAWING NO. | REV. A |
| ı | | # | # | D6017 | SHEET 1 OF 1 |
| I | DATE | | | TITLE | SCALE |
| | 06.06.30 | | | CROSSTUBE MATERIAL | 1:1 |
| | Α | | 06.06.30 | NEW ISSUE | |

SPECIFICATION CONTROL DRAWING

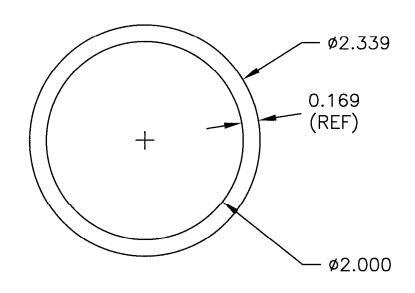

NOTES

1) D6017-XXX CROSSTUBE

WHERE XXX IS LENGTH IN INCHES EG. 115" LONG TUBE: D6017-115

2) MATERIAL: AISI 4130 (AMS 6371) SEAMLESS STEEL TUBE

2.339 OD x 2.000 ID

ANNEALED

3) TOLERANCES ARE PER ASTM A519 AS FOLLOWS:

O.D.: +0.007/-0.000 I.D.: +0.000/-0.007

LENGTH: XXX +0.188/-0.000

STRAIGHTNESS: 0.010" DEVIATION / 12" LENGTH

4) EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE.

Copyright © 2006 by DART AEROSPACE LTD